

BRSDR-SW-1100MA


ITEM NO. DRIVER -28026

BRSDR-SW-400-1100mA is a constant current LED driver featuring plug & play cable.

Input: 110-277VAC ~ 50-60Hz
Output: 400-1100mA, 49V Max



Dimension

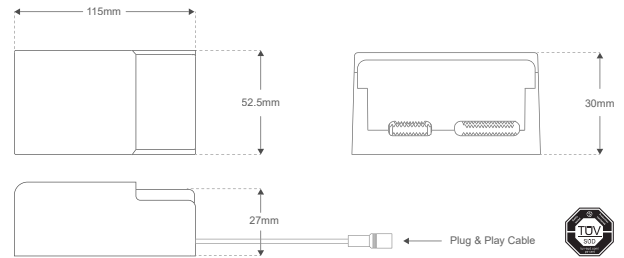

Technical Specifications

Dimming Options	Switched
Type	Constant Current
Input Voltage	110-277VAC
Input Frequency	50-60Hz
In-Rush Current	<15A/120µs @ 230V
Output Voltage	49V Max
Lifetime	>40,000 hours
IP Rated	IP20
Ta	-25 °C ~ +45 °C
Tc	90 °C
THDi	<20%
Certificate	SELV; RoHS; EL; Protection Class II; TÜV Class II; TÜV

Voltage Range	14-42V						14-38V	
Output Current	400mA	500mA	600mA	700mA	800mA	900mA	1000mA	1100mA
Output Power	16.8W	21W	25.2W	29.4W	33.6W	37.8W	38W	41.8W

BRS DR-SW-1100MA

Technical Specifications

Current	1	2	3
400mA	-	-	-
500mA	-	-	ON
600mA	-	ON	-
700mA	-	ON	ON
800mA	ON	-	-
900mA	ON	-	ON
1000mA	ON	ON	-
1100mA	ON	ON	ON

Features & Functions

- Flicker Free
- Universal Input Voltage 110-277VAC
- Current Selectable By 3 x Dip Switches
- Push-fit Secondary Terminals
- Overload Protection
- Thermal Cutout
- Short-circuit Protection
- Constant Light Output Function