

# BRSR-280MA


ITEM NO. DRIVER -28017

BRSR-SW-160-350mA is a constant current LED driver featuring plug & play cable.

Input: 110-277VAC ~ 50-60Hz  
 Output: 160-350mA, 49V Max



## Dimension

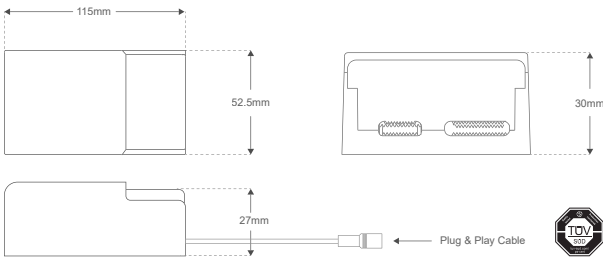

## Technical Specifications

Dimming Options	Switched
Type	Constant Current
Voltage Range	14-42V
Input Voltage	110-277VAC
Input Frequency	50-60Hz
In-Rush Current	<10A/22µs @ 230V
Output Voltage	49V Max
Lifetime	>40,000 hours
IP Rated	IP20
Ta	-25°C ~ +45°C
Tc	90°C
THDi	<20%
Certificate	SELV; RoHS; EL; Protection Class II; TÜV


Output Current	160mA	180mA	220mA	280mA	320mA	350mA
Output Power	6.8W	7.6W	9.3W	11.8W	13.5W	14.7

## BRS DR-SW-280MA

### Technical Specifications

Current	1	2	3
160mA	-	-	-
180mA	-	-	ON
220mA	-	ON	ON
280mA	ON	-	ON
320mA	ON	ON	-
350mA	ON	ON	ON

### Features & Functions

- Flicker Free
- Universal Input Voltage 110-277VAC
- Current Selectable By 3 x Dip Switches
- Push-fit Secondary Terminals
- Overload Protection
- Thermal Cutout
- Short-circuit Protection
- Constant Light Output Function