

BRS DR-SW-350MA


ITEM NO. DRIVER -28019

BRS DR-SW-160-350mA is a constant current LED driver featuring plug & play cable.

Input: 110-277VAC ~ 50-60Hz
Output: 160-350mA, 49V Max



Dimension

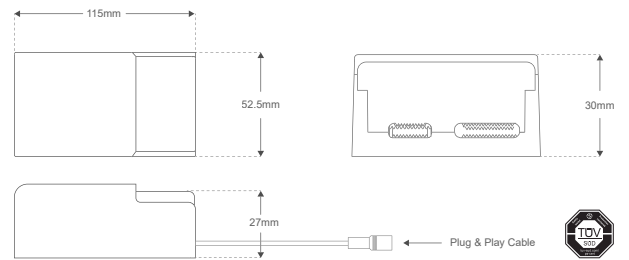

Technical Specifications

| | |
|-----------------|---|
| Dimming Options | Switched |
| Type | Constant Current |
| Voltage Range | 14-42V |
| Input Voltage | 110-277VAC |
| Input Frequency | 50-60Hz |
| In-Rush Current | <10A/22μs @ 230V |
| Output Voltage | 49V Max |
| Lifetime | >40,000 hours |
| IP Rated | IP20 |
| Ta | -25°C ~ +45°C |
| Tc | 90°C |
| THDi | <20% |
| Certificate | SELV; RoHS; EL; Protection Class II; TÜV |

| Output Current | 160mA | 180mA | 220mA | 280mA | 320mA | 350mA |
|----------------|-------|-------|-------|-------|-------|-------|
| Output Power | 6.8W | 7.6W | 9.3W | 11.8W | 13.5W | 14.7 |

BRS DR-SW-350MA

Technical Specifications

| Current | 1 | 2 | 3 |
|---------|----|----|----|
| 160mA | - | - | - |
| 180mA | - | - | ON |
| 220mA | - | ON | ON |
| 280mA | ON | - | ON |
| 320mA | ON | ON | - |
| 350mA | ON | ON | ON |

Features & Functions

- Flicker Free
- Universal Input Voltage 110-277VAC
- Current Selectable By 3 x Dip Switches
- Push-fit Secondary Terminals
- Overload Protection
- Thermal Cutout
- Short-circuit Protection
- Constant Light Output Function