



DIABLOENGINE™

NANO ▶ MICRO ▶ MINI

orlight®
FROM SOURCE TO SITE



Advanced Thermal Management
Through Cold Forging

CREE inside
High Performance
LED Chipset

Detachable Optic
15 Degree
35 Degree
55 Degree

Truly Retro-fit
Fits our standard
Architectural
range of downlights

CRI90+
Superior colour
performance

Customised Bezels
Available in White
or Black to suit your fixture



TECHNOLOGY INSIDE Leading/Trailing dimming




4 Colour Temperature Options

2700K 3000K 4000K 5000K

36V CREE
CREE 1512 CHIPSET

DIABLONANO: 4W 100mA Up to 550lm DIABLOMICRO: 6W 150mA Up to 700lm DIABLOMINI: 8W 200mA Up to 850lm

Incorporating the CREE 1512 LED
chipset to deliver amazing output
and efficiency in the same package

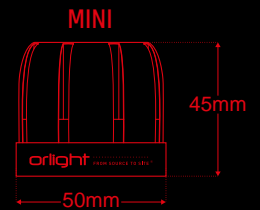

Get amazing High CRI with the: DIABLOMINICRI98ENGINE™

MINI ▶ 8W 200mA Up to 600lm ▪ Up to CRI98 ▪ Flawless Dimming

CRI98
Superior colour
performance

Detachable Optic
24 Degree
36 Degree
60 Degree




2 Colour Temperatures
2700K 3000K

Customised Bezels
Available in White
or Black to suit your fixture

orlight FROM SOURCE TO SITE®


www.orlight.com | 01923 851 890



DIABLO ENGINE™

NANO ▶ MICRO ▶ MINI ▶ MINI CR198

orlight®
FROM SOURCE TO SITE

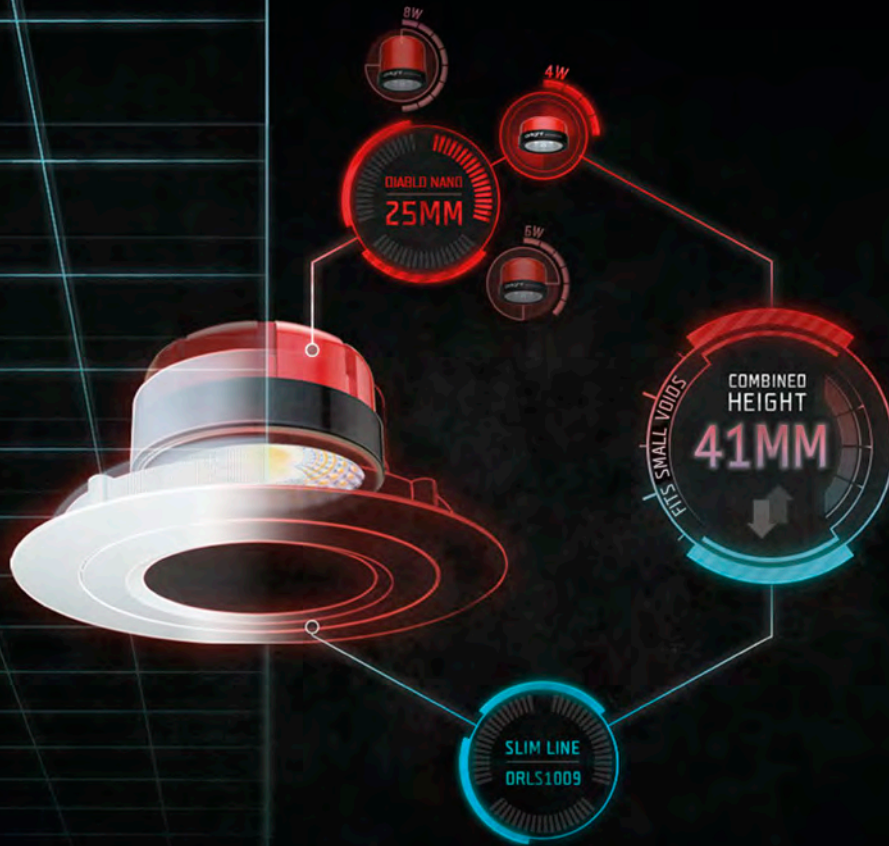

Retain the flexibility of your lighting design and future proof your scheme with our new advanced compact engine technology

