


ORL1551-SQ - Square LED Surface Fixture

Description


Decorative square fixture featuring a Polycarbonate base, opal diffuser and Stainless Steel trim. Integral LED Driver with configurations to accommodate switched, 1-10V, DALI, DSI, Corridor and Push Dim control methods. The fixture is rated to IP65 and is available in a variety of finishes. Emergency options available.

Dimensions

Fixing Details

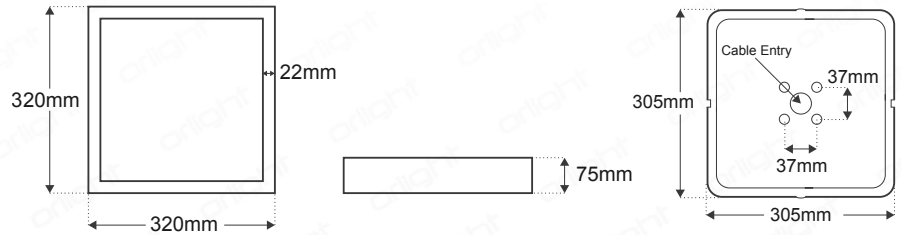

Polar Report

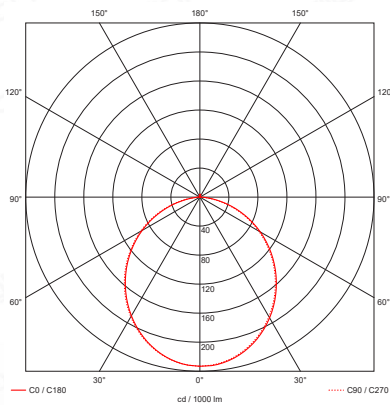

Specifications

Chipset	2835 SMD LED Chipset
Dimming Options	Switched; 1-10V; DALI; DSI; CF; PD (Selected configuration will be Integral)
Power Consumption	22W
Current	700mA
Voltage	220-240V
Colour Temperature	4000K
Light Output ~	1729lm
lm Per Watt ~	79lm/W
CRI	>80
Beam Angle	120°
Binning	3 Step MacAdams Ellipse
Chip Life TM-21	Reported L70 > 36,000 Hours
Ambient Temperature	-20°C ~ +40°C
IP Rating	IP65
IK Rating	IK08
Weight	2015g
Material	Polycarbonate body; Stainless Steel trim
Finish	Black; White; Stainless Steel

Finishes

Stainless Steel



Black



Specifications - Emergency Mode (Selected configuration will be Integral)

Battery	NiCd SC2000mAh 3.6V 3Cell
Light Output ~	158lm
Battery Life	> 3 Hours

Product Coding: Example: ORL1551-S-SQ-WH-LED-4K-DALI-EM

CODE	FINISH	LAMP	COLOUR TEMP	DIMMING OPTION	EMERGENCY OPTION
ORL1551-S-SQ	WH - (WHITE)	LED	4K	ND - (SWITCHED)	EM - EMERGENCY
	BL - (BLACK)			1-10V	EM - EMERGENCY
	SS - (STAINLESS STEEL)			DALI	EM - EMERGENCY
				DSI	EM - EMERGENCY
				CF - (CORRIDOR FUNCTION)	EM - EMERGENCY
				PD - (PUSH DIM)	EM - EMERGENCY