


RADIUS- Corner Mounted Linear Luminaire




Description

Corner fixture featuring Aluminium construction finished in White RAL9016 and opal diffuser. Integral LED Driver with configurations to accommodate 1-10V, DALI control methods and emergency options.

Dimensions

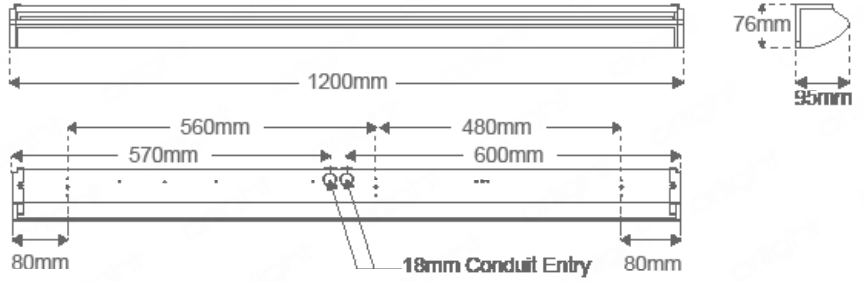

Polar Report

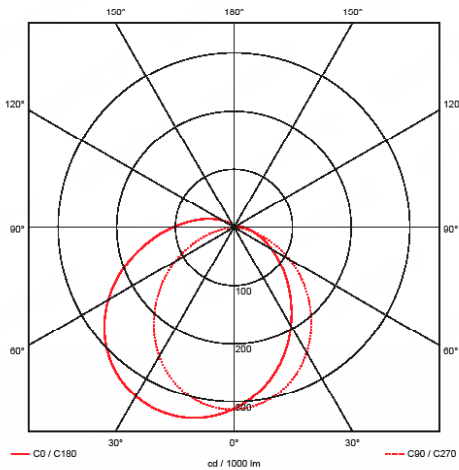

Specifications

Light Source	2835 SMD LED
Dimming Options	Switched; 1-10V; DALI (Selected configuration will be Integral)
Current	850mA
Power Consumption	44W
Voltage	240V
Colour Temperature	4000K
Light Output ~	4635lm
lm Per Watt ~	105lm/W
CRI	>80
Beam Angle	120°
Ambient Temperature	-40°C ~ +40°C
IP Rating	IP20
IK Rating	IK08
Weight	2000g
Material	Aluminium; Polycarbonate
Finish	White RAL9016

Colourmetrics

4000K

R1	R2	R3	R4	R5	R6	R7	R8
83	89	94	84	83	86	87	67
R9	R10	R11	R12	R13	R14	R15	
13	75	84	66	84	97	77	

Specifications - Emergency Mode (Selected configuration will be Integral)

Battery	4 Cell NiMH 4.0Ah 4.8V
Light Output ~	524lm
Battery Life	> 3 Hours

Product Coding: Example: RADIUS-WH-4000K-DALI

CODE	FINISH	COLOUR TEMP	CONTROL OPTION	EMERGENCY OPTION
RADIUS	WH - (WHITE)	4000K	ND - (SWITCHED)	EM
			1-10V	EM
			DALI	EM